



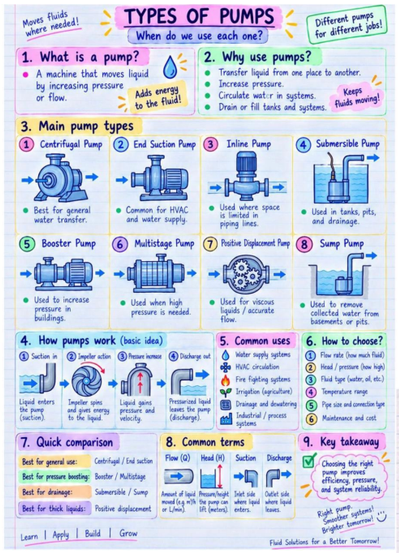


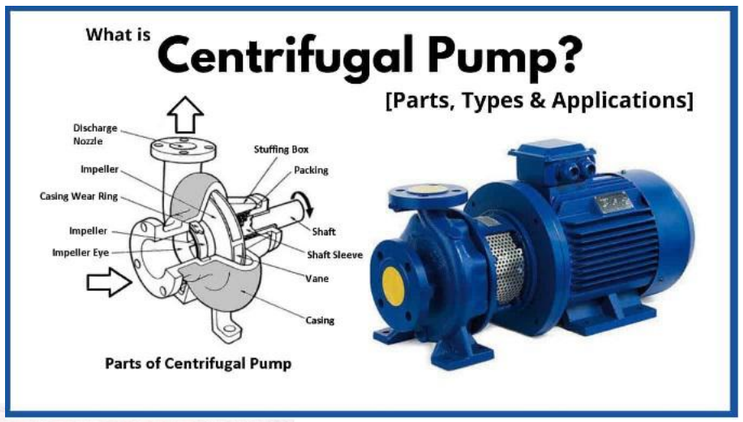

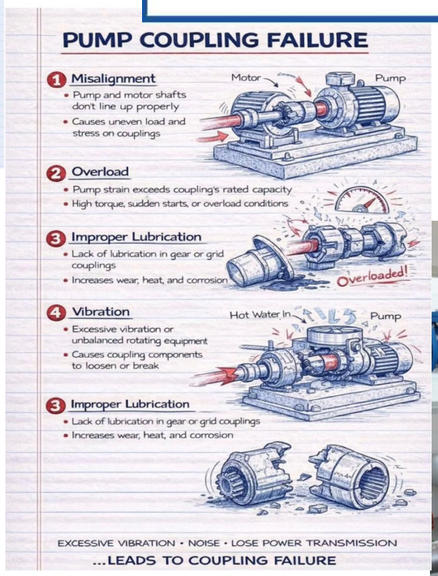


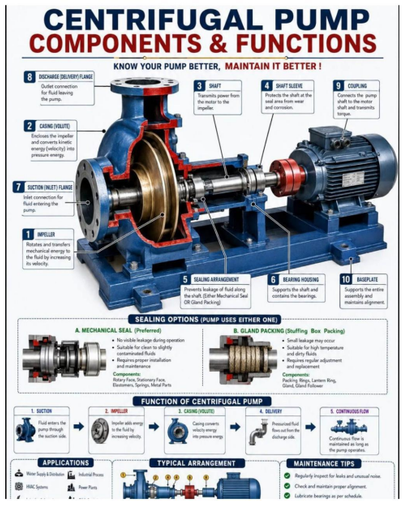

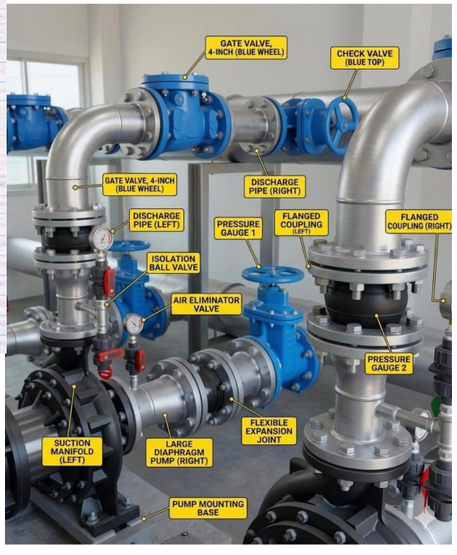

CENTRIFUGAL PUMPS	RECIPROCATING PUMPS
Frequency - DAILY	**Frequency - DAILY**
Visual Inspection	Check oil levels
Bearing visual function Checks	Visual Check for leaks
Lubrication of rotating components	Noise checks for anomalies
Seals & Flush Lines	Monitor temperatures
	Check & Verify gauges
Frequency - WEEKLY	**Frequency - WEEKLY**
Vibration Analysis:	Lubricate components
Lubrication Replenishment for housings	Rotate (Manually) the crankshaft
Foundation and base frame condition monitoring	Check belts conditions
Frequency - MONTHLY	**Frequency - MONTHLY**
Coupling & Alignment check	Valves and seals check
Electrical checks on motor, panel and wiring	Packing inspection
Wear Rings check for condition . Function	Alignment check
Frequency - TURNAROUND	**Frequency - TURNAROUND**
LOTO	LOTO
Decouple	Decouple
Check all components	Shaft Alignment Check
Replace worn out components	Remove / Clean Coupling if not worn out
Overall load test for NPSH	Change / Machine coupling if worn out
Shaft Alignment Check	Change Shaft Key if worn out
Remove / Clean Coupling if not worn out	Shaft dismantle and check for straigtness
Change / Machine coupling if worn out	Weld / Machine shaft
Change Shaft Key if worn out	Check bearing seat
Shaft dismantle and check for straigtness	Replace shaft
Weld / Machine shaft	Replace bearing
Check bearing seat	Change Belts
Replace shaft	Motor function check
Replace bearing	Motor rewinding if worn out
Change Belts	Reassemble
Motor function check	Run without coupling
Motor rewinding if worn out	Couple and dry run manually
Reassemble	Alignment recheck
Run without coupling	Full load test
Couple and dry run manually	Paint and TAG if needed
Alignment recheck	Commission
Full load test	
Paint and TAG if needed	
Commission	

T17QEME1284: Clean the Pump Discharge Loop(67-1A)		1006	13-Jan-17 08:00	24-Feb-17 06:00
Pre Shutdown		6	13-Jan-17 08:00	13-Jan-17 14:00
ESTR-5110	Erect Scaffolding/Firebox	4	13-Jan-17 08:00	13-Jan-17 12:00
ESTR-5115	Remove Insulation	2	13-Jan-17 12:00	13-Jan-17 14:00
Shutdown		267	08-Feb-17 08:00	19-Feb-17 11:00
ESTR-5120	Verify LT&T and Obtain PTW	1	08-Feb-17 08:00	08-Feb-17 09:00
ESTR-5125	Mechanical Isolation & Blinding	16	08-Feb-17 09:00	09-Feb-17 01:00
ESTR-5130	CUt & Weld 4" & 3" BU Flanges	36	09-Feb-17 07:00	10-Feb-17 19:00
ESTR-5135	Inspection as per RAT Sheet (BU Flanges)	6	10-Feb-17 19:00	11-Feb-17 01:00
ESTR-5150	Remove Valves & Spools for Cleaning	48	09-Feb-17 10:00	11-Feb-17 10:00
ESTR-5160	Cleaning / Hydrojetting of lines	36	11-Feb-17 10:00	12-Feb-17 22:00
ESTR-5170	Inspection after Cleaning	6	12-Feb-17 22:00	13-Feb-17 04:00
ESTR-5210	Cut & Weld 3/4" Globe Valves (2 nos)	12	14-Feb-17 00:00	14-Feb-17 12:00
ESTR-5220	Inspection as per RAT Sheet	4	14-Feb-17 12:00	14-Feb-17 16:00
ESTR-5230	Hydro Test	6	14-Feb-17 16:00	14-Feb-17 22:00
ESTR-5235	Painting Weld Joints	4	14-Feb-17 22:00	15-Feb-17 02:00
ESTR-5180	Fix Back Valves & Spools after Cleaning	48	14-Feb-17 04:00	16-Feb-17 04:00
ESTR-5190	Replace Valves as per list (8 nos)	36	16-Feb-17 13:00	18-Feb-17 01:00
ESTR-5200	Replace NRVs as per list (3 nos)	12	18-Feb-17 01:00	18-Feb-17 13:00
ESTR-5240	Carry out De-Blinding	16	18-Feb-17 18:00	19-Feb-17 10:00
ESTR-5250	Housekeeping & Close PTW	1	19-Feb-17 10:00	19-Feb-17 11:00
ESTR-5260	Mechanical Completion	0		19-Feb-17 11:00
Post Shutdown		115	19-Feb-17 11:00	24-Feb-17 06:00
ESTR-5270	Fix Back Insulation	8	19-Feb-17 11:00	19-Feb-17 19:00
ESTR-5280	Remove Scaffolding/Firebox	4	24-Feb-17 02:00	24-Feb-17 06:00

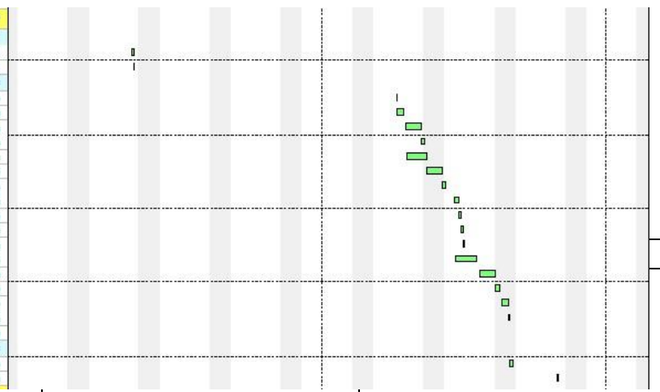

Drw Purpose Code :-
R01- Educational

Status of Approval :-
01

Dimentions as Mentioned
NA

Drawing Scale :- NTS

Engg Code :- 02

Backup Info Code :- 04

Angle of Projection
NA

Sheet Size
A3

Statutory Note:
This document is prepared by rPlan and is the sole proprietory of the company.Its purpose is educational and no references within this document are for Engineering or Design corelation with the applicable codes. For any clarifications beyond the intended purpose viewers can always correspond to rPlan via its company website.This drw is not for duplication without company permission!

Drw electronic code

rPlan AT 39, MERMAID 1 CHS LTD., SEC-11, CBD-BELAPUR, NAVI MUMBAI - 400614

Legal Owner

QR CODE
NA

Description:
Typical FRAGNET Pumps Maintenance

Drawn By: DFT-01

Drawn Date: 20260729

Checked Approved by: rPlan-01

Checked Approved Date: 20260816

Drawing Number: As Barcoaded

Sheet: 1 of 1

Rev: 00